




CURVED PROFILE
SERIES

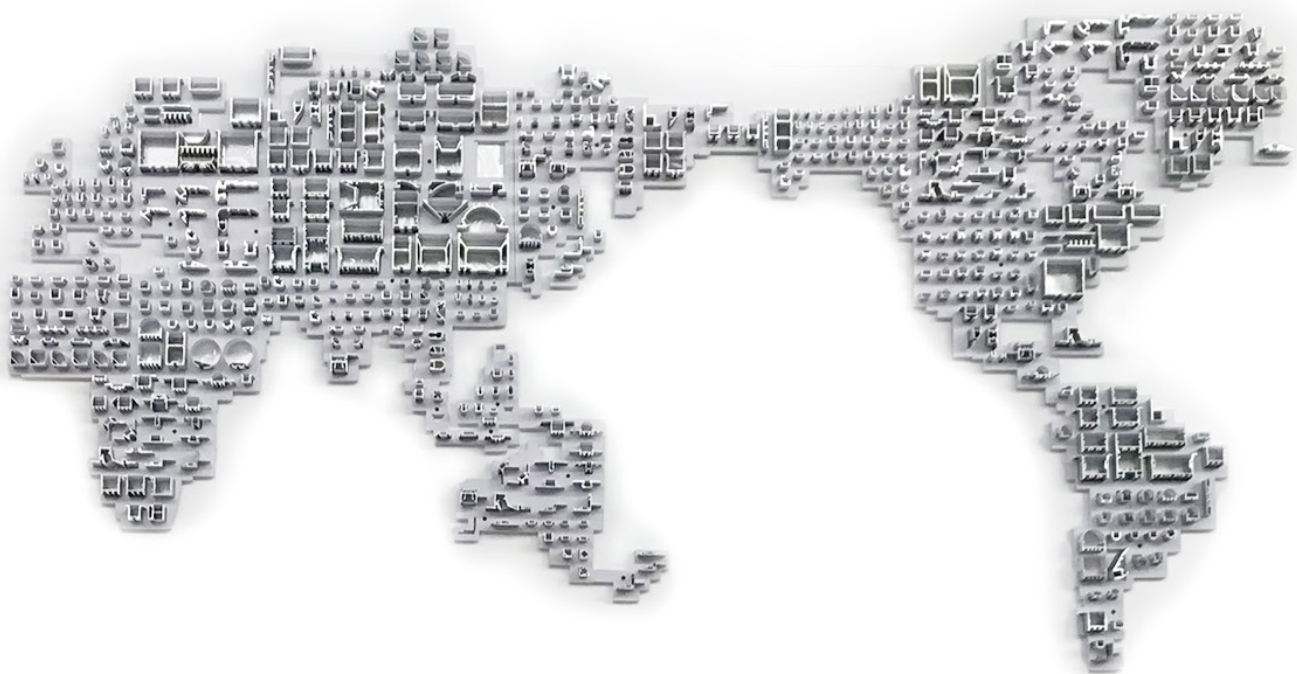

LED Linear Lighting Total Supply Chain Solution Provider


COMPANY PROFILE

QS-LITE (Shenzhen Qiseguang Lighting Co.Ltd) is an established in 2009 lighting manufacturers who focus on research and development, production and provide total supply chain for LED linear lighting.


In 2019, Our products get ISO9001 quality certification and implementation also comply with domestic and international certifications (CE certification and ROHS certification). We are constantly designed new technical solutions to meet all different requirements from what we have gained in related industries. We can understand well the needs that our clients who want to create or design.


In order to better ensure the integrity of the industrial chain, the second factory - Foshan Qiseguang Aluminium Co.Ltd, located in Sanshui, Foshan, was established in 2018. The new factory covers an area of 6000 square metres. It is mainly used for the production of aluminium profiles to provide aluminium profiles for the Shenzhen company to meet the large number of orders demanded by the Shenzhen company, as well as to provide technological transformation and upgrading of the Shenzhen.

We adhere to the business philosophy of Integrity, Pragmatism, Innovation and Responsibility. Serving both domestic and international markets. Exporting products to many countries, ensuring quality and safety and providing world-class products and services to our customers.

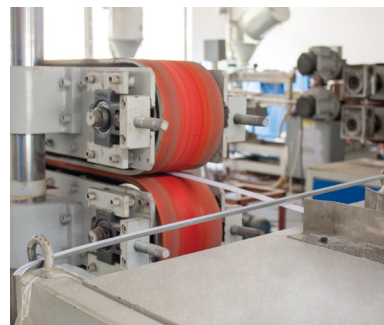

QSLITE FACTORY

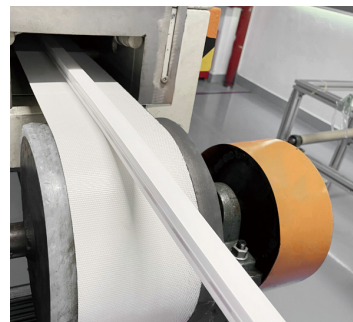

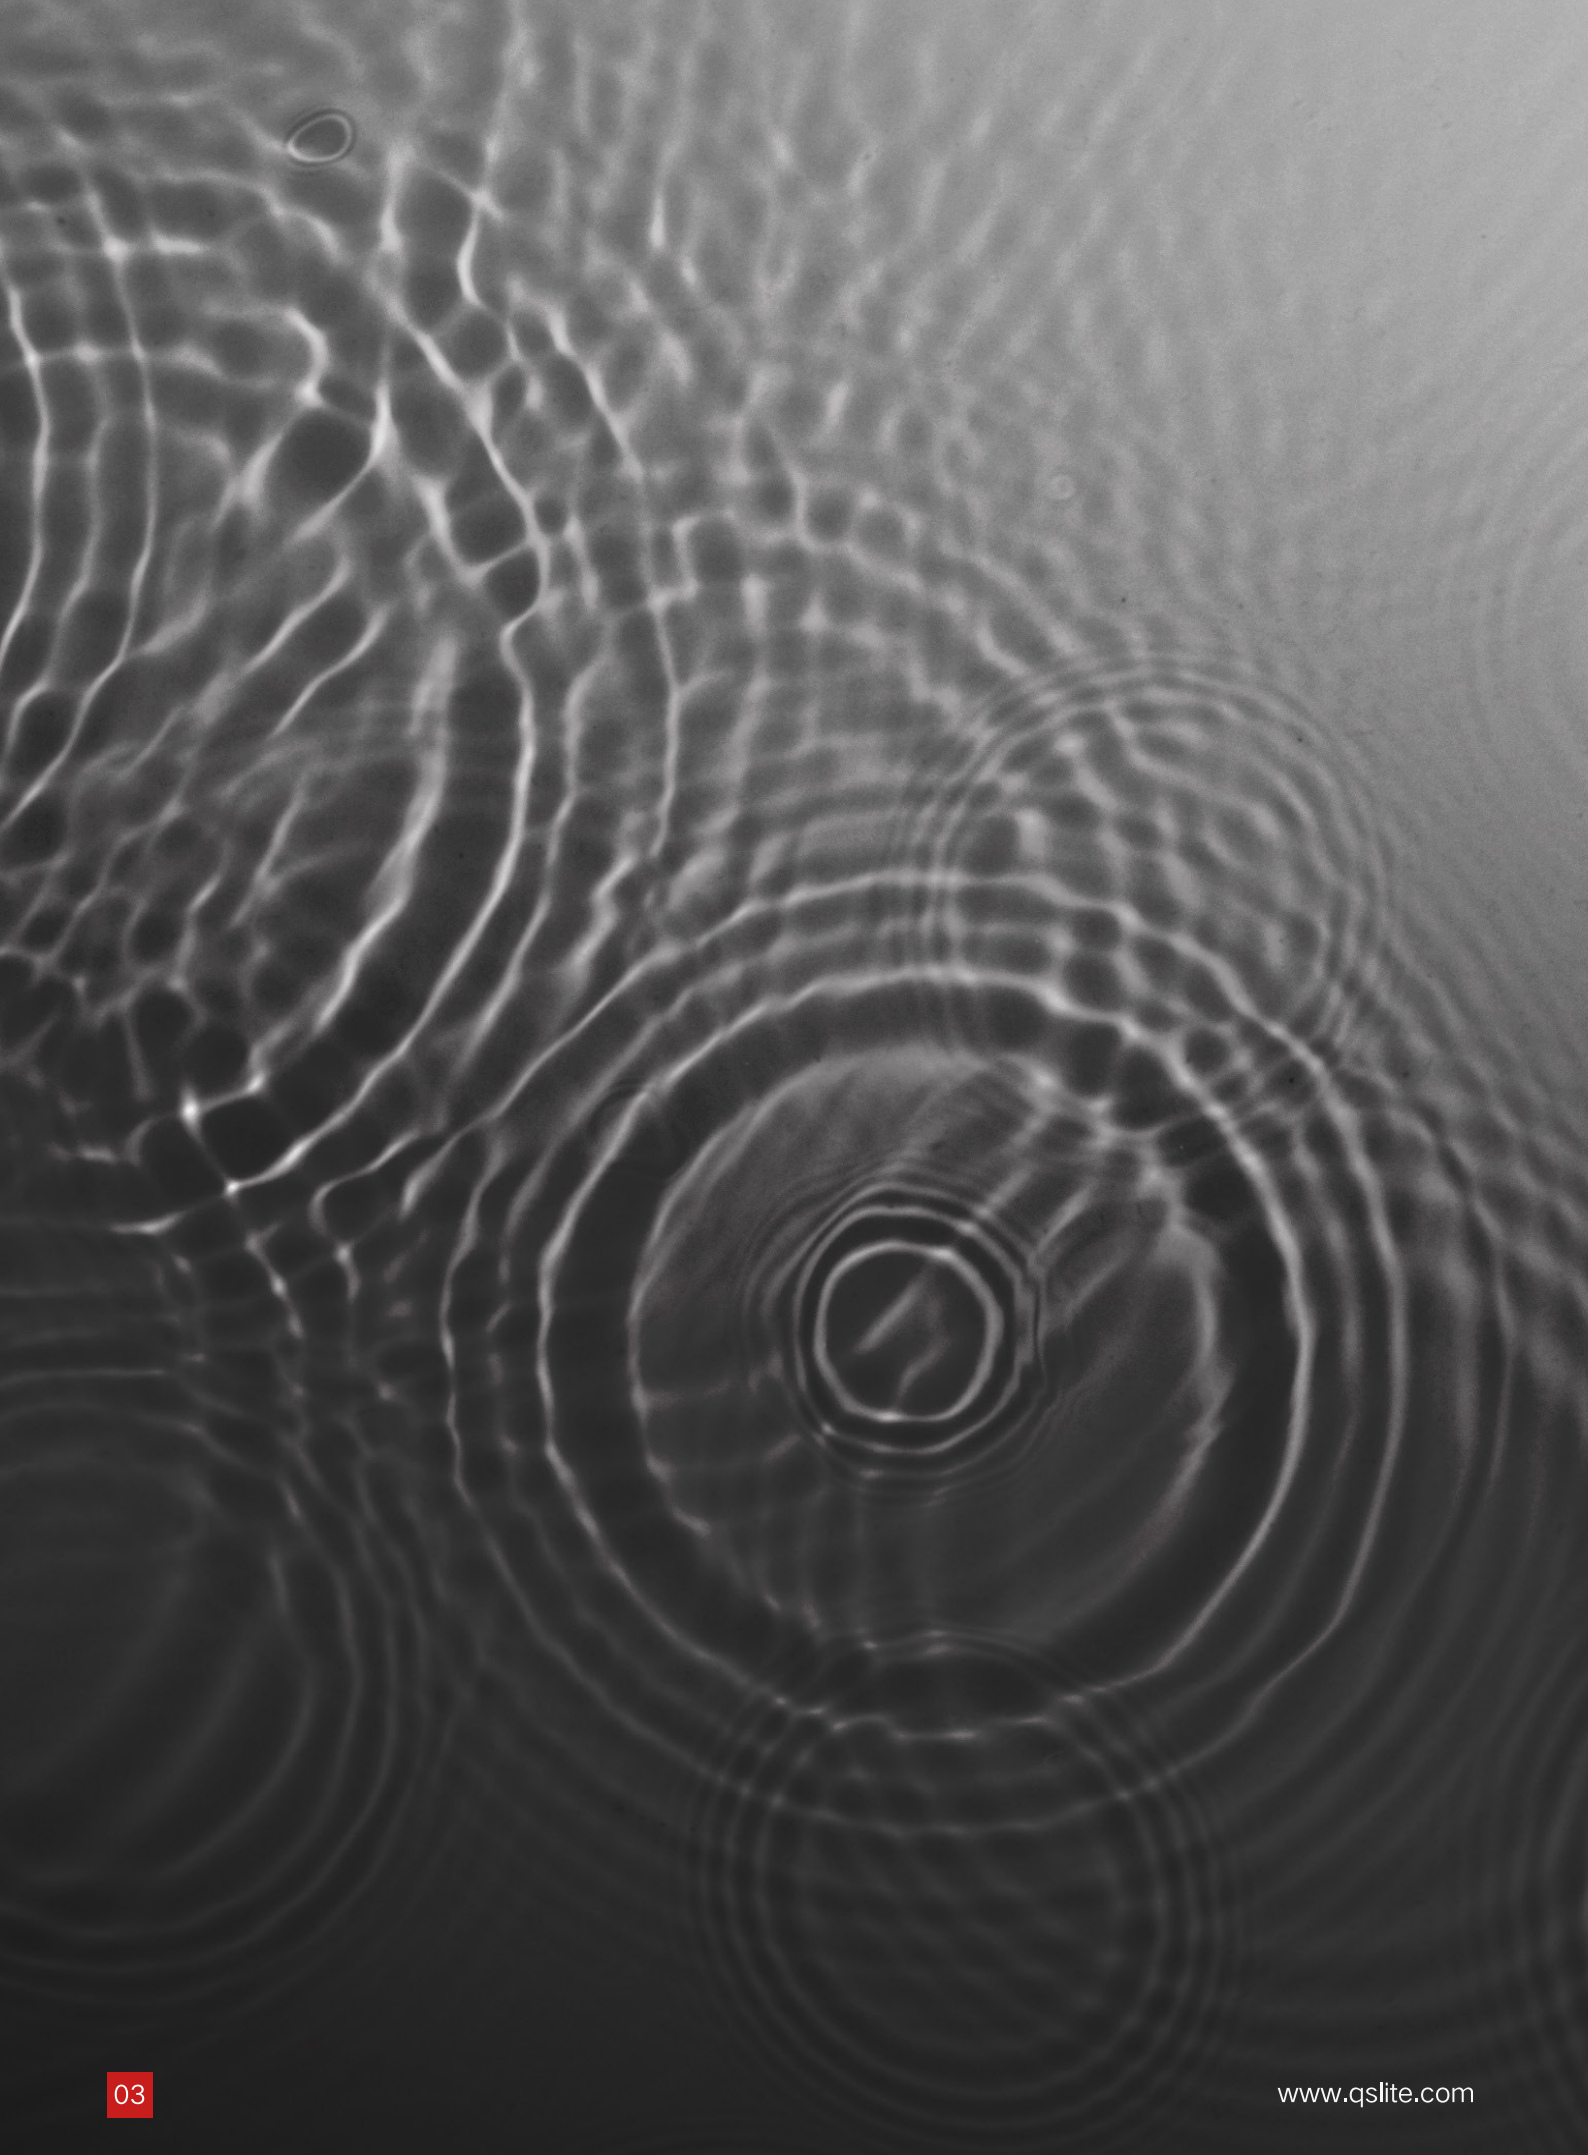




Outward




Recessed



Surface

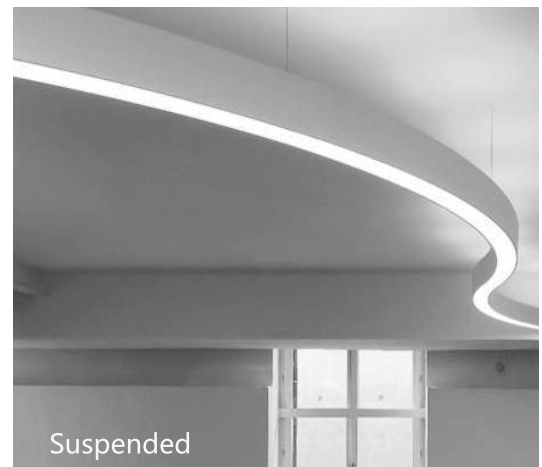

Suspended

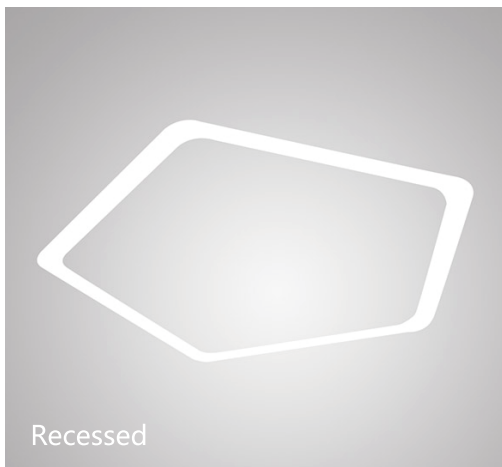

Recessed





Suspended

Curved profile series, through the sublimation from straight line to curve, transformation from 2D to 3D linear lighting is brought with a brand- new revolutionary experience. The straight and curve basic modules are utilized to produce various circular luminaires, interconnect curves freely and intersperse combines structure randomly. Limitless possibilities produce limitless imagination. The flowing light shuttles back and forth along the edge of ceilings, wall and floors, creating thousands of styles and opening new illumination horizons.

MANUFACTURING TECHNIQUE

We can achieve the minimum diameter for each model, and we use professional bending machines to achieve different sizes and shapes of bending.

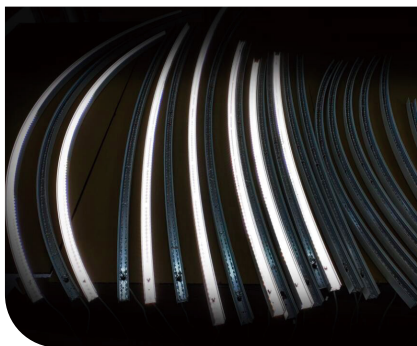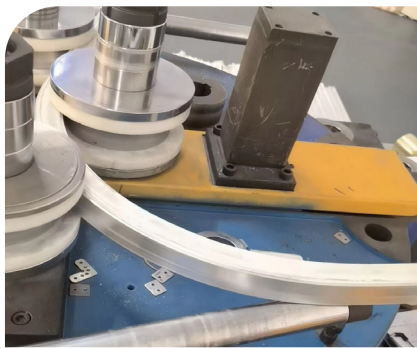


SILICONE COVER

Peculiarity


1. Silicone cover is simple and easy to install.
2. The light output of the silicone cover is uniform, and the light transmittance can reach 75%.
3. Silicone material, processed by PMMA, strong softness.
4. Super long silicone cover, no gap, the length can be customized according to the shape profile.



CUSTOMIZED CIRCULAR SIZE

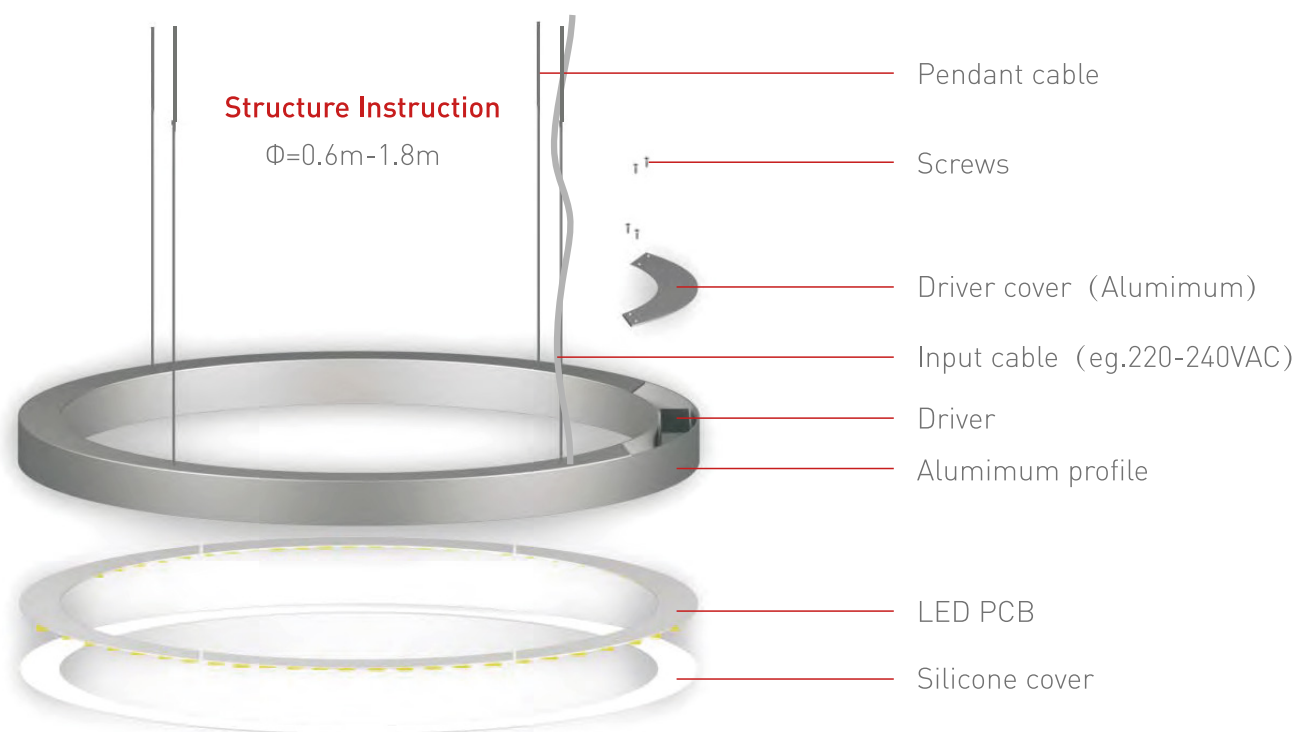


Different angles can be customized

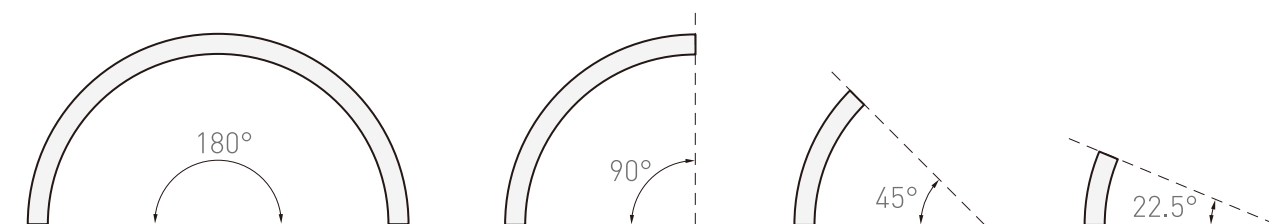


Diameter 600 - - - - -
50W-3089lm
3000K/4000K/5000K/6000K




Diameter 1200 - - - - -
50 W - 3339 lm
3000K/4000K/5000K/6000K

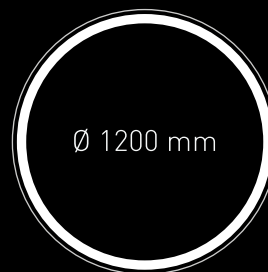


Diameter 1500 - - - - -
50 W - 3378 lm
3000K/4000K/5000K/6000K

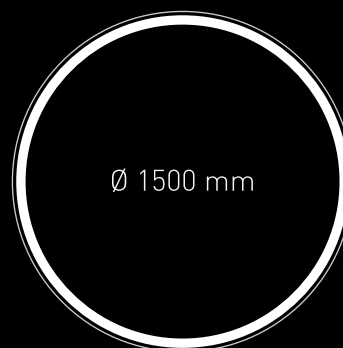


Diameter 1800 - - - - -
50 W - 3418 lm
3000K/4000K/5000K/6000K

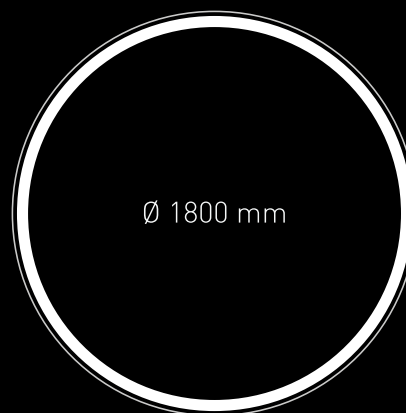

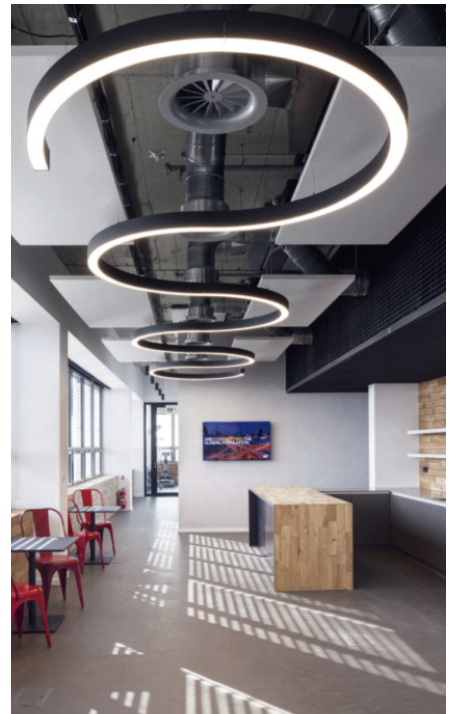


APPLICATION EFFECT

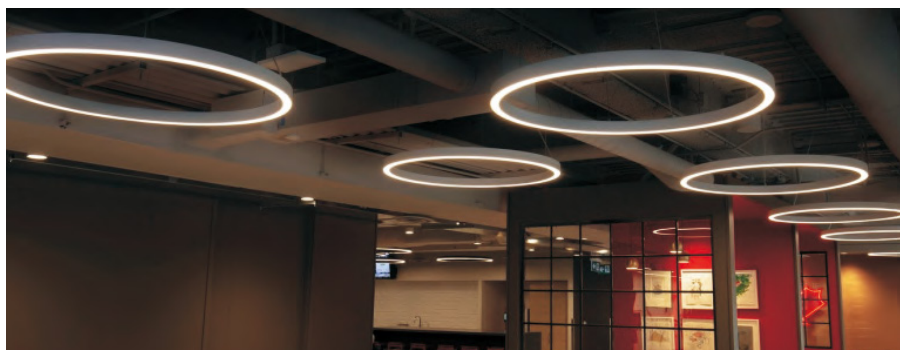







/ Suspended Series




QSG-C3535




QSG-C5030




QSG-C5090




QSG-C2525




QSG-C3538




QSG-C8038




QSG-C10038



QSG-C2538




QSG-C5050




QSG-C5075


/ Recessed Series




QSG-CR35



QSG-CR50




QSG-CR80




QSG-CR100

/ Side Lighting Series





QSG-CS35



QSG-CS50

35mm wide LED Curved Extrusion Profile

QSG-C3535 New

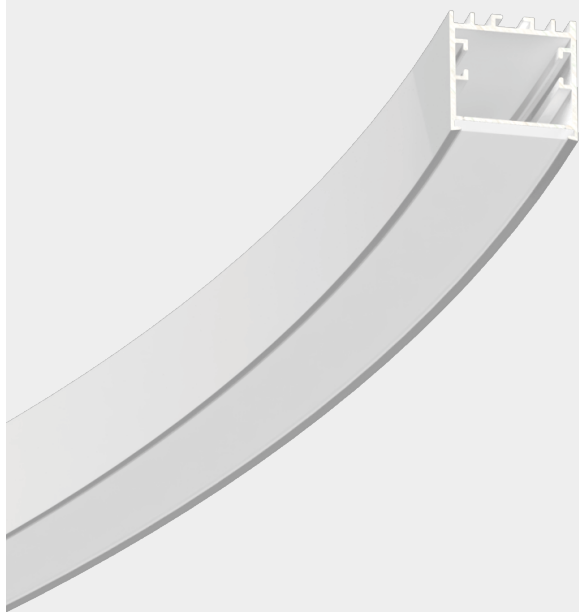

Circular Rings

Min.dia: Ø1200 mm

Largest: no limitation



Customized shape

Min. radius: 600 mm

Any design is welcome



ACCESSORIES

ALU PROFILE



Silver



Black



White



RAL

SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP

Optional

Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply

Option 2 : Dali / 0-10v / Triac dimmable

LED






LED module **105lm/W** (after cover)
Constant current



LED bendable strip
Constant voltage

35mm wide LED Curved Extrusion Profile

QSG-C5030 New

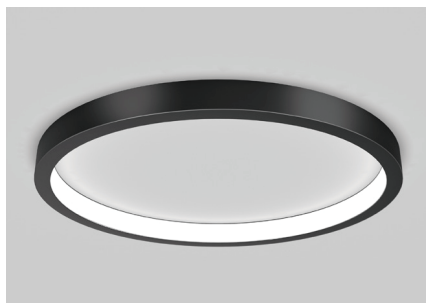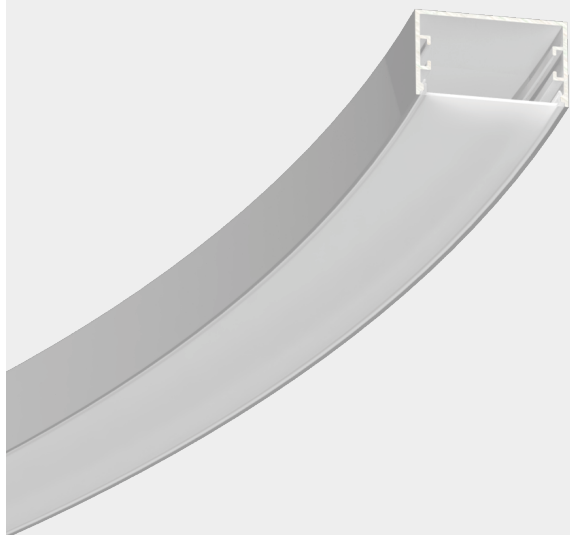

Circular Rings

Min.dia: Ø1200 mm

Largest: no limitation



Customized shape

Min. radius: 600 mm

Any design is welcome



ACCESSORIES

ALU PROFILE



Silver



Black



White



RAL

SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP

Optional

Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply

Option 2 : Dali / 0-10v / Triac dimmable

LED





LED module **105lm/W** (after cover)
Constant current



LED bendable strip
Constant voltage

50mm wide LED Curved Extrusion Profile

QSG-C5090 New

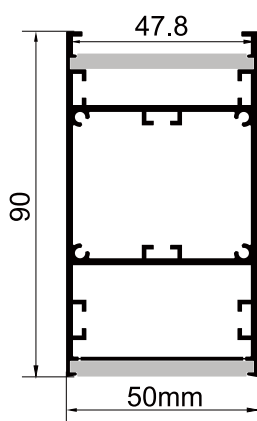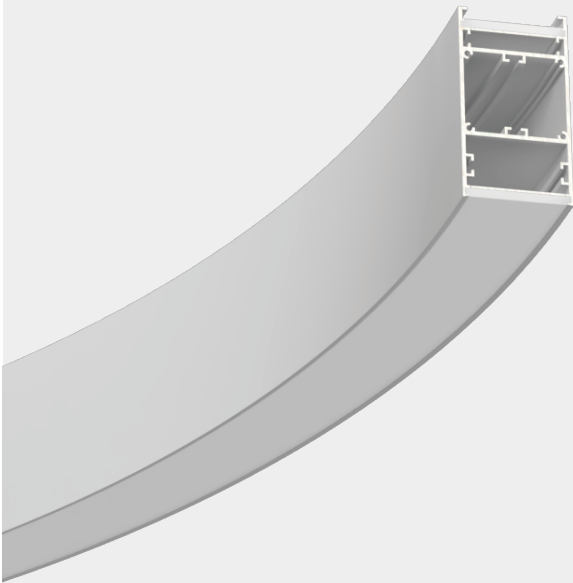

Circular Rings

Min.dia: Ø1200 mm

Largest: no limitation



Customized shape

Min. radius: 600 mm

Any design is welcome



ACCESSORIES

ALU PROFILE



SILICONE COVER





END CAP

Optional Durable aluminum end cap



WIRE SUSPENSION



DRIVER



- 1  Option 1 : Switching power supply
- 2  Option 2 : Dali / 0-10v / Triac dimmable

LED

- 1  LED module **105lm/W** (after cover)
Constant current
- 2  LED bendable strip
Constant voltage

25mm wide LED Curved Extrusion Profile


QSG-C2525

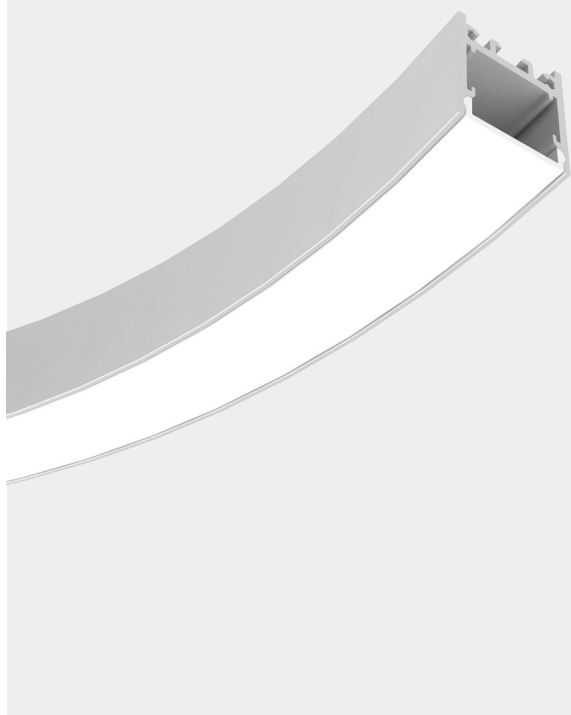

Circular Rings

Min.dia: Ø1200 mm

Largest: no limitation

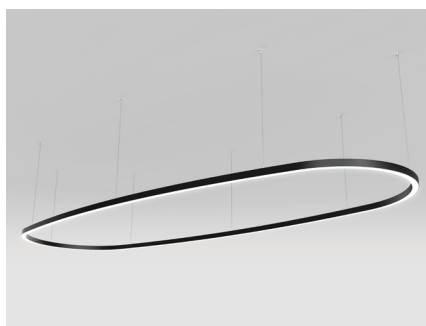

Customized shape

Min. radius: 600 mm

Any design is welcome



ACCESSORIES

ALU PROFILE



SILICONE COVER





END CAP

Optional Durable aluminum end cap



WIRE SUSPENSION



DRIVER


- 1  Option 1 : Switching power supply
- 2  Option 2 : Dali / 0-10v / Triac dimmable

LED

- 1  LED module **105lm/W** (after cover)
Constant current
- 2  LED bendable strip
Constant voltage

35mm wide LED Curved Extrusion Profile

QSG-C3538



Circular Rings

Min.dia: Ø600 mm

Largest: no limitation



Customized shape

Min. radius: 300 mm

Any design is welcome



ACCESSORIES

ALU PROFILE



Silver



Black



White



RAL

SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP



Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply

Option 2 : Dali / 0-10v / Triac dimmable

LED





LED module **105lm/W** (after cover)
Constant current



LED bendable strip
Constant voltage

80mm wide LED Curved Extrusion Profile

QSG-C8038

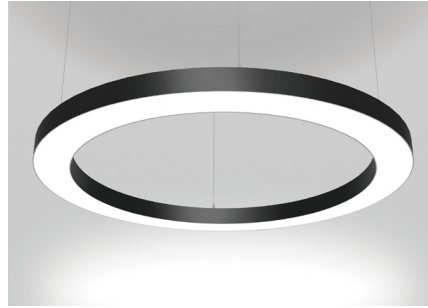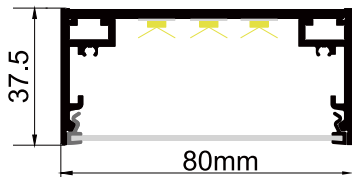

Circular Rings

Min.dia: Ø600 mm
Largest: no limitation



Customized shape

Min. radius: 300 mm
Any design is welcome



ACCESSORIES

ALU PROFILE



SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP



Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply
Option 2 : Dali / 0-10v / Triac dimmable

LED





LED module 105lm/W (after cover)
Constant current

LED bendable strip
Constant voltage

100mm wide LED Curved Extrusion Profile

QSG-C10038

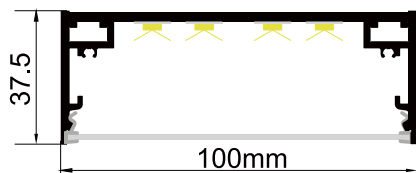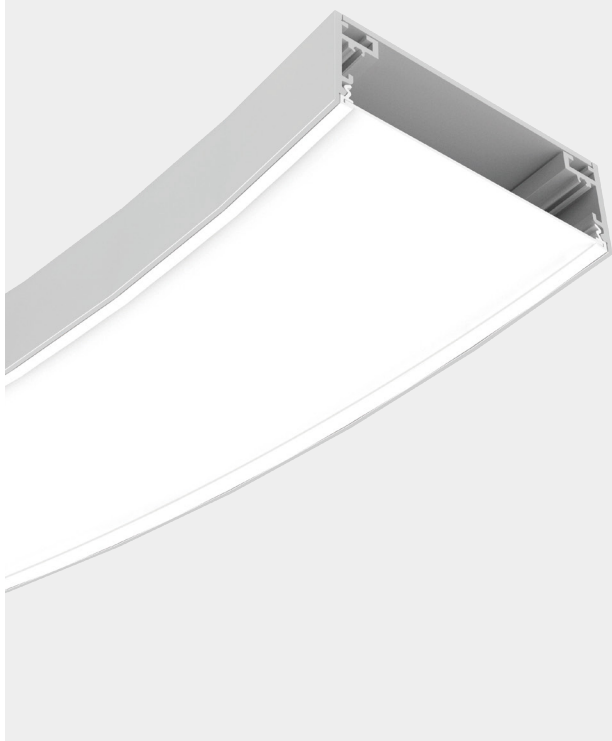

Circular Rings

Min.dia: Ø600 mm
Largest: no limitation



Customized shape

Min. radius: 300 mm
Any design is welcome



ACCESSORIES

ALU PROFILE



Silver



Black



White



RAL

SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP

Optional

Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply
Option 2 : Dali / 0-10v / Triac dimmable

LED




LED module **105lm/W** (after cover)
Constant current



LED bendable strip
Constant voltage

25mm wide LED Curved Extrusion Profile

QSG-C2538



Circular Rings

Min.dia: Ø600 mm


Largest: no limitation



Customized shape

Min. radius: 300 mm

Any design is welcome

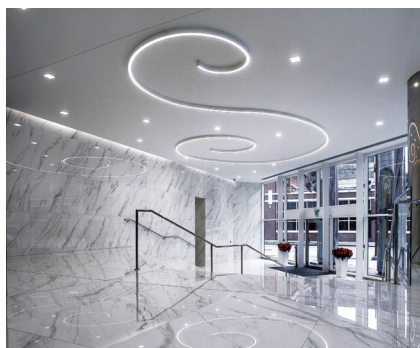

ACCESSORIES

ALU PROFILE



SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP

Optional

Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply

Option 2 : Dali / 0-10v / Triac dimmable

LED




LED module **105lm/W** (after cover)
Constant current



LED bendable strip
Constant voltage

50mm wide LED Curved Extrusion Profile

QSG-C5050

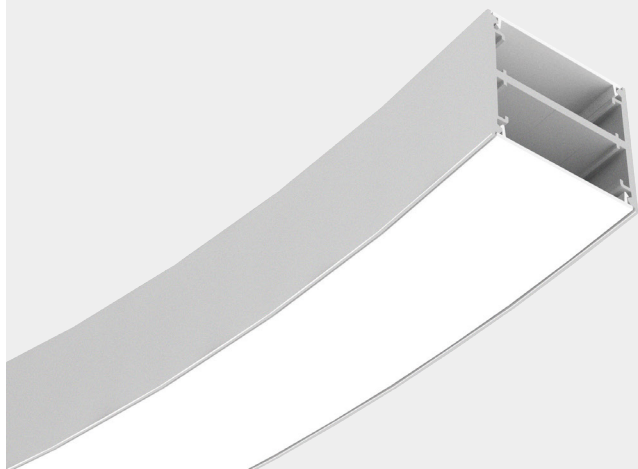

Circular Rings

Min.dia: Ø600 mm


Largest: no limitation



Customized shape

Min. radius: 300 mm

Any design is welcome



ACCESSORIES

ALU PROFILE



SILICONE COVER




END CAP




WIRE SUSPENSION



DRIVER




LED



50mm wide LED Curved Extrusion Profile

QSG-C5075

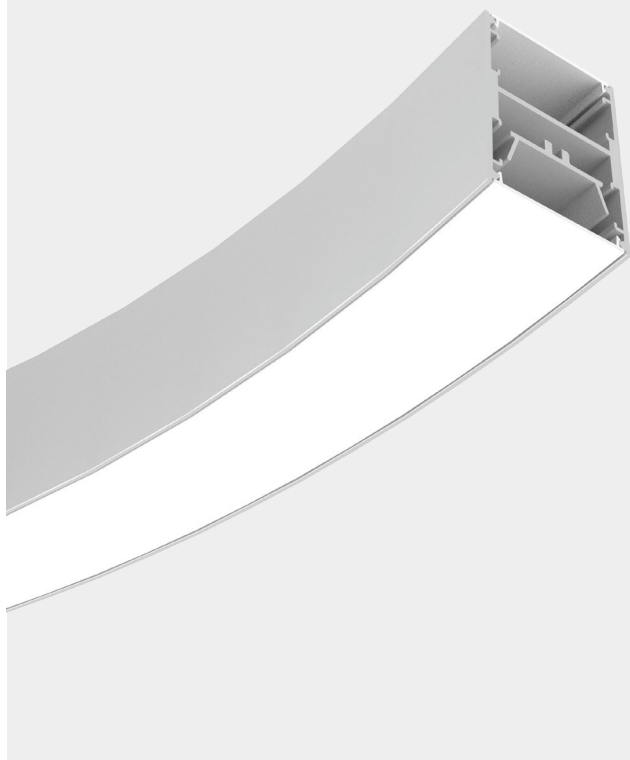

Circular Rings

Min.dia: Ø600 mm



Largest: no limitation



Customized shape

Min. radius: 300 mm

Any design is welcome

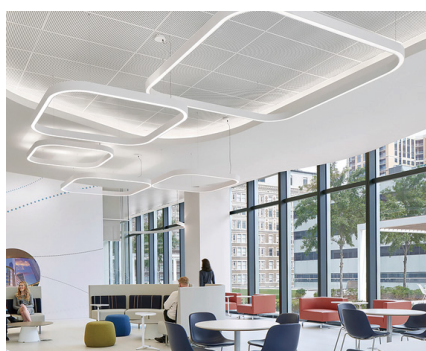

ACCESSORIES

ALU PROFILE



SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP

Optional

Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply

Option 2 : Dali / 0-10v / Triac dimmable

LED





LED module **105lm/W** (after cover)
Constant current



LED bendable strip
Constant voltage

35mm wide LED Curved Extrusion Profile

QSG-CR35

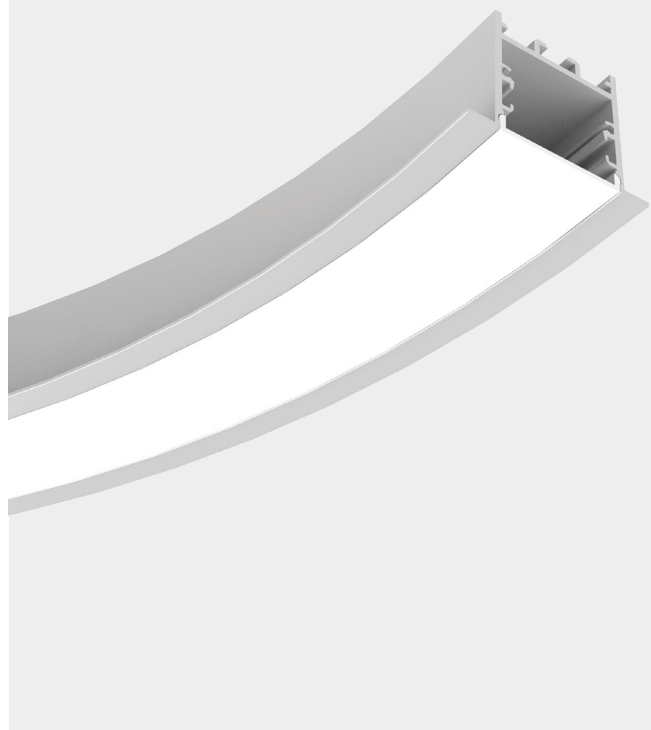


Recessed



Circular Rings

Min.dia: Ø600 mm

Largest: no limitation

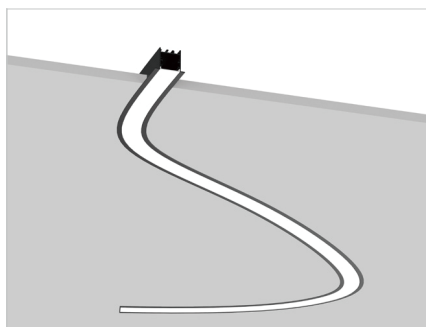

Customized shape

Min. radius: 300 mm

Any design is welcome



ACCESSORIES

ALU PROFILE



SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP



Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply

Option 2 : Dali / 0-10v / Triac dimmable

LED



LED module **105lm/W** (after cover)
Constant current



LED bendable strip
Constant voltage

50mm wide LED Curved Extrusion Profile


QSG-CR50



Circular Rings

Min.dia: Ø600 mm


Largest: no limitation

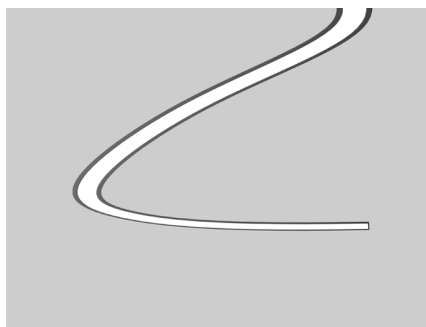

Customized shape

Min. radius: 300 mm

Any design is welcome



ACCESSORIES

ALU PROFILE



Silver



Black



White



RAL

SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP



Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply

Option 2 : Dali / 0-10v / Triac dimmable

LED






LED module **105lm/W** (after cover)
Constant current



LED bendable strip
Constant voltage

80mm wide LED Curved Extrusion Profile


QSG-CR80

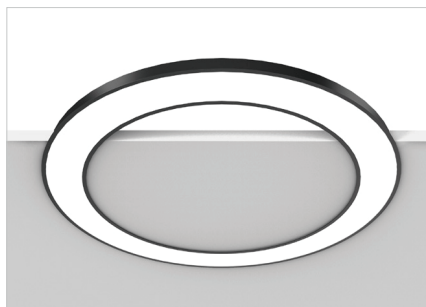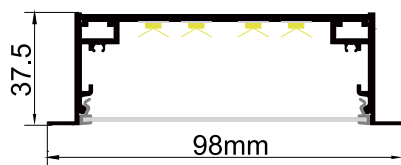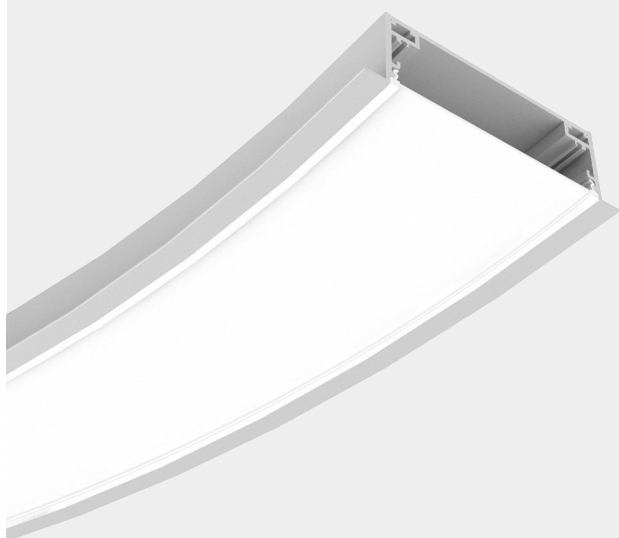

Circular Rings

Min.dia: Ø600 mm

Largest: no limitation

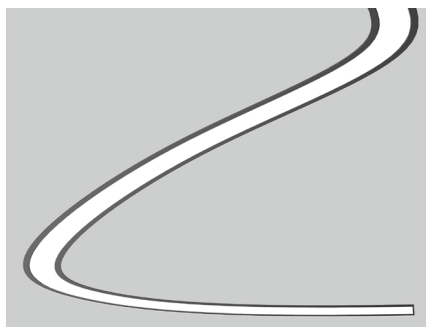

Customized shape

Min. radius: 300 mm

Any design is welcome



ACCESSORIES

ALU PROFILE



Silver



Black



White



RAL

SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP



Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply

Option 2 : Dali / 0-10v / Triac dimmable

LED






LED module **105lm/W** (after cover)
Constant current



LED bendable strip
Constant voltage

100mm wide LED Curved Extrusion Profile


QSG-CR100

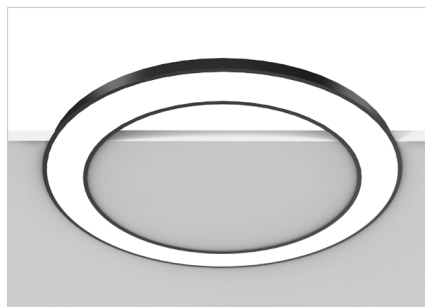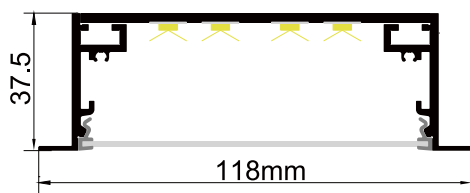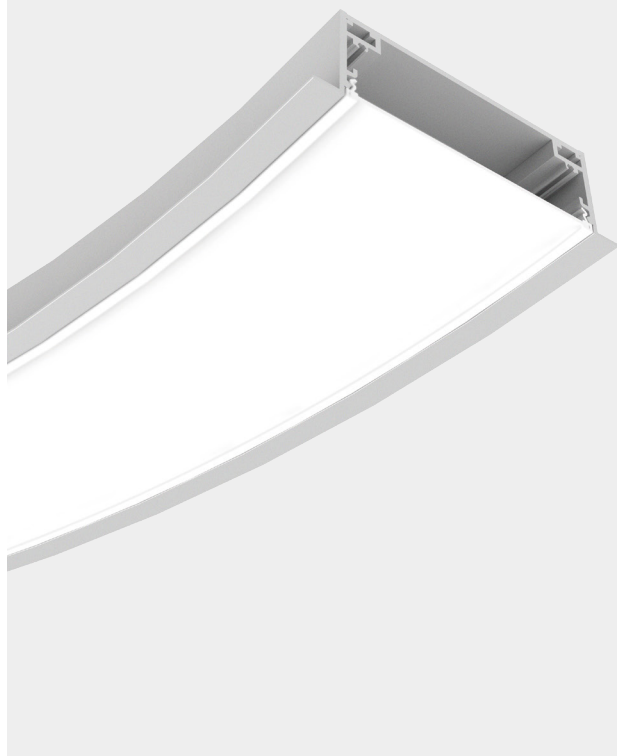

Circular Rings

Min.dia: Ø600 mm

Largest: no limitation

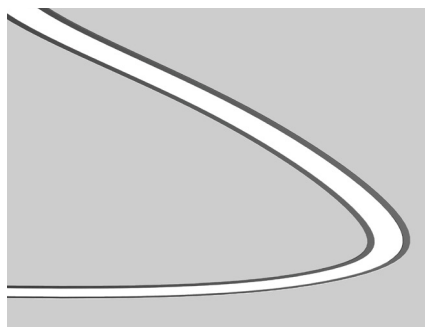

Customized shape

Min. radius: 300 mm

Any design is welcome



ACCESSORIES

ALU PROFILE



Silver



Black



White



RAL

SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP



Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply

Option 2 : Dali / 0-10v / Triac dimmable

LED






LED module **105lm/W** (after cover)
Constant current



LED bendable strip
Constant voltage

Side illuminated LED Curved Extrusion Profile


QSG-CS35

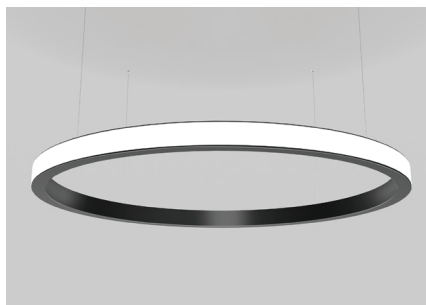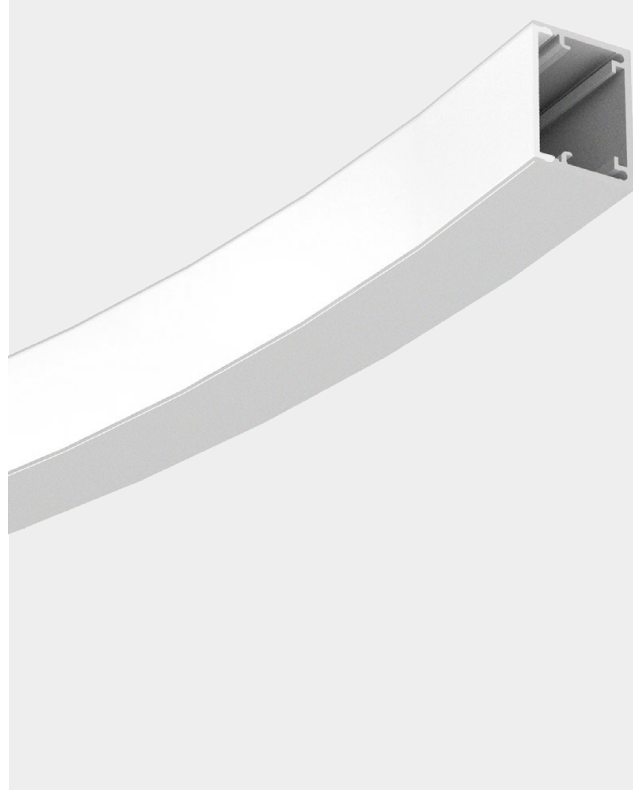

Circular Rings

Min.dia: Ø600 mm

Largest: no limitation

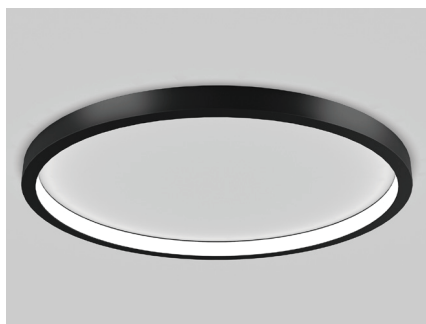

Customized shape

Min. radius: 300 mm

Any design is welcome



ACCESSORIES

ALU PROFILE



SILICONE COVER





END CAP

Optional Durable aluminum end cap

WIRE SUSPENSION



DRIVER


- 1  Option 1 : Switching power supply
- 2  Option 2 : Dali / 0-10v / Triac dimmable

LED

- 1  LED module **105lm/W** (after cover)
Constant current
- 2  LED bendable strip
Constant voltage

Side illuminated LED Curved Extrusion Profile


QSG-CS50

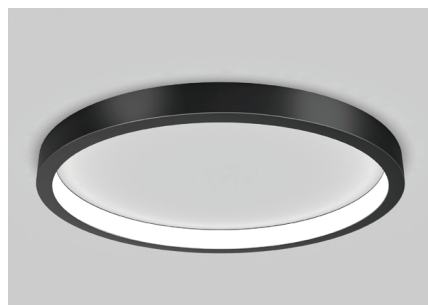

Circular Rings

Min.dia: Ø600 mm


Largest: no limitation

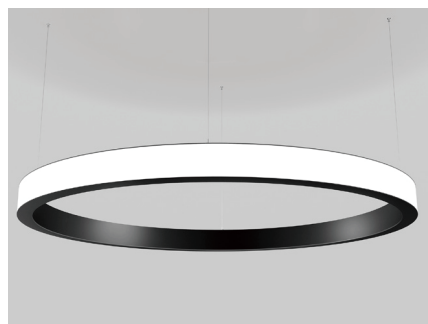

Customized shape

Min. radius: 300 mm

Any design is welcome



Suspended outer



Suspended inner

ACCESSORIES

ALU PROFILE



Silver



Black



White



RAL

SILICONE COVER



Curved PMMA new opal diffuser (light trans. 75%)

END CAP

Optional

Durable aluminum end cap

WIRE SUSPENSION



Stainless steel cable

DRIVER



Option 1 : Switching power supply



Option 2 : Dali / 0-10v / Triac dimmable

LED



1

LED module **105lm/W** (after cover)
Constant current



2

LED bendable strip
Constant voltage

QISEGUANG CO.,LTD
FOSHAN QISEGUANG ALUMINUM CO.,LTD

Add1 : Building 9-10, No.71 Nanhuan Road, Xinqiao Street, Baoan District, Shenzhen, China

Add2 : No.43, Xile Road, Sanshui District, Foshan, China

Tel: 86-755-29714990 I Fax: 86-755-27171036

E-mail: info@qsgledprofile.com I info@shenzhenqiseguang.com

Website: www.qslite.com I www.qsgledprofile.com

